



the **coach house**
collection of craftsman built garage doors



contemporary & traditional September 2010



quality

the rich tones of timber - matchless natural





A simple thing...

A simple thing, quality - when you know how.

At Woodrite Doors we are time-served joiners with years of experience. With an eye for detail and an ability to work with, rather than against the natural properties of our selected timbers, we produce the very best.

The Coach House range of garage doors represents the finest of its kind, hand-built in cedar and finished to exacting standards.

With a little care timber lasts well and is forgiving of minor knocks and bumps. Our fully finished doors are protected by a special base-treatment and UV resistant finishing coats for lasting good looks.

Select with confidence knowing you are in good hands - craftsman's hands.

the thing about timber...

Today's approach seems to be all about uniformity, however those of us who know true beauty understand the value of wood.

Every door is unique with it's own character. We select the timbers for each door to work sympathetically together not to hide the natural variations. If you are fitting doors side by side let us know and we'll make your doors from similar tones and grains to create complementary pairing.

Something unique?


If you don't see the style you seek over the coming pages and have something special in mind, let us know - we have made hundreds of bespoke doors over the years and will help bring your ideas to life.

quality



cho

The Uxbridge finished in silver with stainless steel porthole window

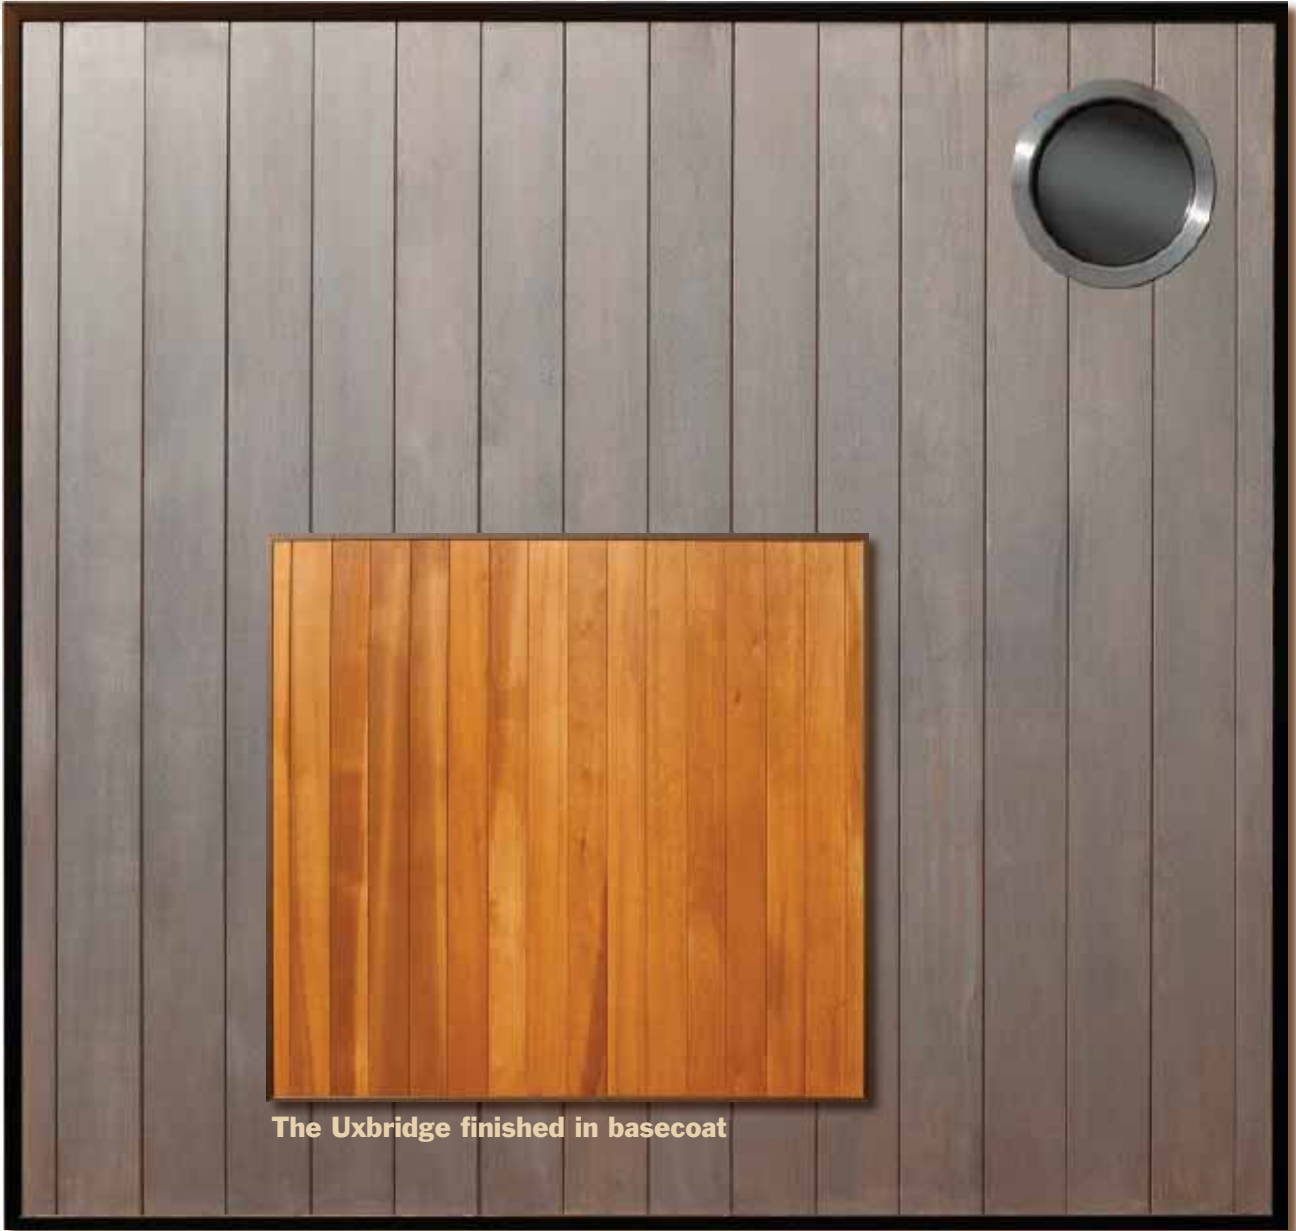

The Uxbridge finished in basecoat

the wow factor...

Wow factor or subtle classic? Timber does both. Choose your style and finish to transform a traditional door into a modern master. The Uxbridge shown above is given a contemporary twist with a silver grey finish.

unique

timeless appeal

The Coach House collection

The Buckingham and Somerset up and over ranges and the York side hinged range combine to create the Coach House Collection.



how do I choose?...

Choosing the right door for you is simple -

- Select the style from one of the many designs over the coming pages.
- Decide which colour you'd like.
- Add any options such as a different handle colour, window leading if it's available on your style, or canopy operating gear on a single sized up and over door if you prefer this over the standard retractable operating gear.

Done! All the different options are explained here, or on the following pages but if you're unsure about anything just ask your local specialist or give us a call on: **01280 841010**

Which colour?...

Each door is available with a base-treatment that you will need to stain in a colour of your choice, or factory fully finished in one of eight classic timber shades.

Woodrite uses the Sonneborn & Rieck "Impra" wood finish system and recommends this for on site finishing - contact Woodrite for your nearest stockist.



The finish provides a low gloss surface that can be wiped clean with a soft cloth and water. Re-staining is recommended at least every three years, but keep an eye on the finish as south facing doors in strong sunlight may require more regular care...

...Love your wood!



What will my size of door look like?



Double doors over 10'6" wide are created with the appearance of two single doors side by side to ensure proportions are retained. Doors up to 10'6" wide use repeated features or wider proportions for each feature to achieve an attractive and balanced design. The Chesham, Hardwick, Tingewick, Uxbridge and Wendover styles are fully boarded designs and feature an anodized steel subframe to protect timber ends. All other styles are "edgeless"

Handles and locks?...




Black Brass effect Chrome effect

See page 14-15 for side hinged door details


Doors are supplied with a black handle and key operated lock to activate the multi point latches - security comes as standard! For doors that are to be motorized, lock deletion can be specified at the time of order - locks can always be fitted at a later date but lock holes cannot be removed! Two alternative finishes for the handle are available and shown above.

How will my door operate?


All up and over doors are supplied on retractable opening gear as standard.



Retractable gear is ultra-reliable and perfect for automation. It also provides light and easy spring assisted opening when operated manually. The door slides up and back, "retracting" almost completely into the garage on tracks fixed to the garage ceiling or side walls.



Canopy opening gear is available as an option on single doors up to 8'0" wide and 7'0" high. The door slides up on spring assisted arms running in tracks fitted to the back of the frame legs and forms a "canopy" that projects out from the front of the garage.

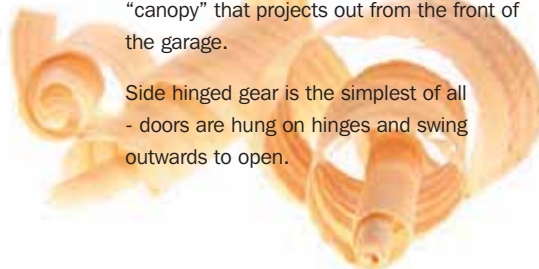

Side hinged gear is the simplest of all - doors are hung on hinges and swing outwards to open.

The Bierton



The Bledlow



The Burnham



The Chartrige



The Chesham



The Coleshill*

* Available with square or diamond lattice leading as a no cost option (see page right).

buckingham

Coach house

classic design

The Buckingham Coach House range

Gorgeous... Hand crafted in cedar mouldings and cedar tongue and groove boards for timeless appeal in sixteen designs



The Chalfont



A word about windows

Doors that feature windows are constructed with sections of stippled polycarbonate that allows light to pass into the garage but cannot be seen through. Clear polycarbonate is available as a no cost option.

The Colsehill, Radnage, and Ickford styles from the Buckingham range and the York Denholme and Shelley are also available with square or diamond leading as a no cost option.



The Gawcott




Stippled (clear option available)



Square lattice leading



Diamond lattice leading

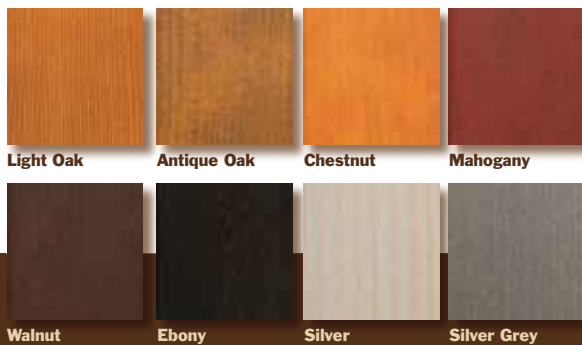


The Hardwick



The Ickford*



The Quinton

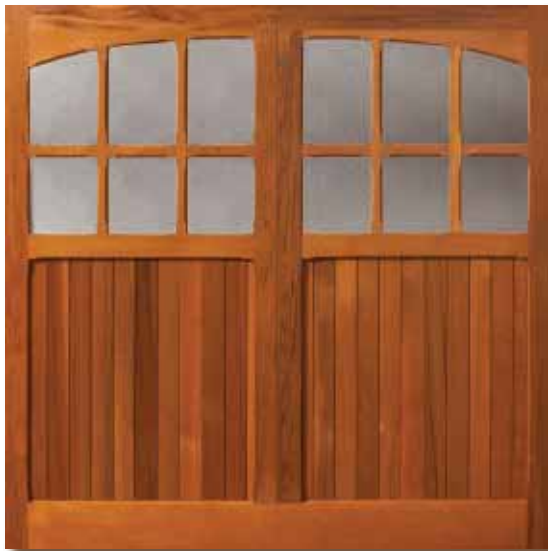

The Taplow



The Tingewick



The Uxbridge

* Available with square or diamond lattice leading as a no cost option (see page 7).

buckingham Coach house

Warmth, richness

The Buckingham Coach House range

Gorgeous... Hand crafted in cedar mouldings and cedar tongue and groove boards for timeless appeal in sixteen designs



The Radnage*



The Wendover

How is my door made?

All doors are built to order from grade one selected cedar tongue and groove boards and mouldings. All boards are individually dipped in base coat to ensure penetration into the end grain and grooves. A wide range of standard sizes is available, however special sizes can be made to measure in mm increments.

Boarded designs such as the Tingewick and the Uxbridge have an anodised steel subframe that protects the end grain of the boards.



Anodised steel edging

Panel styles such as the Radnage and Taplow are built using a cedar moulding framework with chamfer detailing and cedar tongue and groove boarded infill panels. A polymer sealant bead is applied to prevent rain seepage into the horizontal timber rails.




Chamfer detailing and sealant beading to horizontal rails

All doors have a strong galvanized and powder coated steel chassis in dark brown and zinc that gives the door increased strength, rigidity and provides solid fixing points for the doors lifting gear.



Strong steel chassis

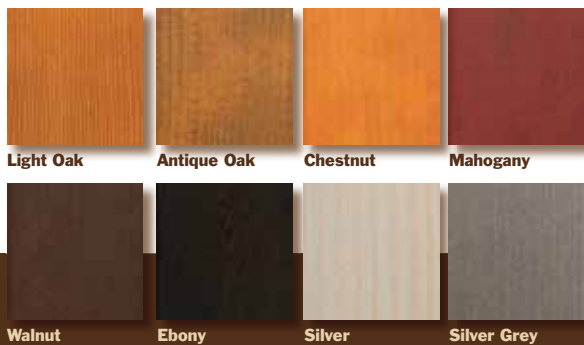

The Appley



The Cannington



The Chard



The Holcombe



The Horton



The Kingsdon

somerset

Coach house

elegance, style

The Somerset Coach House range

Hand crafted in cedar mouldings and cedar faced ply for timeless appeal in twelve designs



The Churchill




What about special designs?

We've years of experience in bringing to life one-off bespoke designs to your individual taste. Whatever your requirements, give us a call and we'll guide you on the best way to approach your special project. Simple or complex, there isn't much we can't do with wood!



A simple but effective variation on the Somerset Tickenham built to a customers design.

The Standerwick

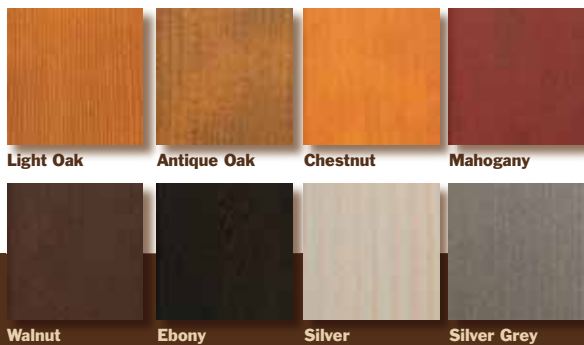

The Taunton



The Tickenham



The Washford



The Yeovil



somerset

Coach house

elegance, style

The Somerset Coach House range

Hand crafted in cedar mouldings and cedar faced ply for timeless appeal in twelve designs



The Tickenham shown fitted to a 68mm steel frame.


Frames?

All doors are available with the option of a frame. Frames are built from galvanized steel and finished in brown, white or black.

Doors up to 8'0" wide X 7'6" high (2438mm X 2286mm) are supplied with the frame pre-fitted to the door. Doors over this width or height are supplied with the frame as a knockdown kit for assembly on site.

For full sizing details on frames and all doors see our price list, however frames are available for canopy doors in 54mm and 68mm frame leg widths and 68mm for retractable doors. Side hinged doors are available with a 65mm frame and the further option of a 70mm softwood or hardwood frame.

All doors can, of course, be fitted to a good quality timber goal post type frame, we recommend a minimum of 70mm X 70mm section to provide adequate fixing for the doors operating gear.

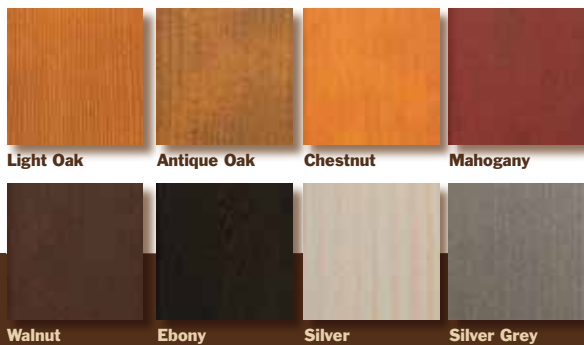

The Bardsey



The Birstall



The Denholme*



The Mirfield



The Otley



The Rawdon

* Available with square or diamond lattice leading as a no cost option (see page 7).

Coach house york



Light Oak

Antique Oak

Chestnut

Mahogany

Walnut

Ebony

The York Coach House range

Hand crafted in cedar mouldings, cedar tongue and groove boarding and cedar faced ply for timeless appeal in eight designs

traditional



The Garforth



Side hinged - traditional style

Our York range of side hinged doors is a traditional classic. The ironmongery we fit to our doors is of a high quality and selected to ensure years of trouble free service.

All packs share the same components and differ only in terms of the type of hinges used, giving a choice of three styles - Contemporary, Classic and Traditional.

Contemporary is fitted as standard and includes three pairs of brass effect butt hinges, a brass effect night latch lock and finger pull (also available in silver effect), a black monkey tail shoot bolt (top) and black foot operated shoot bolt (bottom) to the inactive leaf. A pair of stays is also supplied to hold the door open at 90° and prevent accidental slamming on windy days.

The Classic pack offers two pairs of black or silver effect steel strap hinges and the traditional pack includes hand forged black wrought iron strap hinges.

All doors open right hand leaf first when viewed from outside the garage with the option of left hand opening available on request.

The Shelley*



Contemporary
Brass effect
(3 pairs)




Classic
Black or
silver
(2 pairs)




Traditional
Black
(2 pairs)



All doors include:



Pair of door stays also available in black

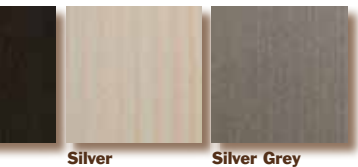

Silver

Silver Grey



Latch lock with finger pull (silver effect front plate also available)



Monkey tail top bolt also available in silver



Foot activated bottom bolt also available in silver



guarantee

Woodrite doors are guaranteed against any form of manufacturing defect or mechanical failure for a period of 2 years from the date of original purchase.

The exterior factory fully finished panel is guaranteed to provide a weatherproof membrane which will resist perforation of the substrate from the weather side due to corrosion for a period of up to 5 years, dependent on location and position of door and provided door has been maintained in accordance with the manufacturers instructions.

conditions

1. During the comprehensive 2 year guarantee period Woodrite undertake to repair or replace (at its discretion), and without charge, products or components which have suffered any form of manufacturing defect. Claims must be notified within 3 days from the date of delivery or within a reasonable time after discovery of any defect.
2. Products covered by these guarantees must have been purchased through an authorised Woodrite garage door supplier or as original equipment attached to a newly built dwelling.
3. The warranties shall apply for normal use only. Normal use constitutes no more than 5 operations (open/close cycles) per day.
4. The warranties offered attach to Woodrite product only and no consequential damages will apply no matter how caused.
5. No liability will be accepted as a result of normal wear and tear, incorrect storage, incorrect handling, faulty installation, incorrect use or wilful damage.
6. Claims under this guarantee must be made through the original supplier and accompanied by relevant documentation indicating the date of purchase (e.g. receipt).
7. Woodrite's maximum liability shall be the original purchase price inclusive of Value Added Tax at the rate prevailing when supplied.
8. Any product which is the subject of a claim:
 - i) must have been correctly installed in accordance with the installation instructions supplied and thereafter properly maintained by a suitably experienced engineer on a regular basis as set out in the Maintenance and Operating Instructions provided with every door. (Additional copies of these instructions are available by contacting the installer or the manufacturing company). We recommend that regular maintenance is provided by a suitably experienced engineer.
 - ii) must have the manufacturers reference number still intact
 - iii) must not have been modified in any way.
9. Claims will not be accepted where the cause is due to:
 - i) impact or mechanical damage suffered during or following installation, e.g scratches, indentations, tears, scuffs or other surface abrasion.
 - ii) damage or discolouration caused by contact with any form of caustic, abrasive or corrosive substance, fumes, bird droppings, fire, smoke, floodwater, salts, acids, or from exposure to abnormal atmospheric pollution.
10. The Exterior Finish Guarantee applies only to the weatherside surface and where more than 5% of the surface area of the door is affected. Surfaces must be freely exposed to washing by rainfall and kept clear of accumulated dirt and debris and given equal exposure to local environmental conditions and consistent natural lighting conditions across the face of the door. Special attention is drawn to Clause (9) (ii).
11. Basecoated timber doors are supplied with a dip immersion coat of Sonneborn & Rieck low build matt water based basecoat of light oak. This operation is for temporary protection for transit and installation purposes only. If the timber panel becomes exposed to excessive water splashes or rain it may result in water marks or stains which could effect the final coating of the door. The topcoat finish must be applied immediately after installation to all surfaces. We recommend a Sonneborn & Rieck high build microporous water based finishing stain or equivalent.
12. Storage – All doors are delivered with cardboard and shrink wrap protection, this should remain in place until final finishing on site. Doors must always be stored in an upright position and protected from possible contaminations prior to fixing. Do not store doors in direct sunlight. Do not puncture the polythene shrink wrap before installation. Do not expose doors to water contaminations, as staining may occur.
13. Attempted repairs by non-qualified individuals shall invalidate this guarantee.
14. The specific terms of this guarantee shall only apply to products purchased on or after September 2010 within the UK and Eire.
15. Woodrite garage doors and associated products are sold subject to the Woodrite's Standard Terms and Conditions of Sale, copies of which are available upon request. Woodrite shall not be liable as a result of any representation, implied warranty or other term or condition or for any consequential loss or damage, costs, expenses or other claims whatsoever except as expressly set out in these Terms and Conditions of Sale.

General Advice

Door Cleaning. Periodically clean the door panel using warm water and a soft cloth or sponge. Allow to dry naturally. Never use detergent, abrasive, caustic or solvent based cleaners as they may damage the door surface. Bird droppings should be removed immediately as these can be particularly caustic.

Door Servicing and Maintenance

All doors should be operated and maintained in line with operating and maintenance instructions supplied with every door. Every six months visually inspect all wear items (including cables) for signs of wear. If wear is detected we recommend you contact your supplier to arrange for a replacement. Garage door springs are under extreme tension and should only be repaired or replaced by a suitably qualified engineer.

Other performance issues affecting Woodrite garage doors are:

The fully finished factory option is supplied in various coloured woodstains and can provide up to 5 years erosion period (dependant on location and position of door). If the door becomes affected by rain soon after installation you may notice a milky coloured staining on the finish of the door and where the sealant is used, this will disappear when dry. This is common phenomenon in water based coatings and over a period of time this will disperse and disappear, this has no adverse effect on the quality and finish of the door.

Woodrite doors are individually handcrafted products manufactured to specific customer order. Due to the nature of the product and the hand finishing processes used they may occasionally display small blemishes which do not detract from the overall appearance of the product. These are regarded as being within manufacturers tolerance when such blemishes are not visible to the naked eye when viewed from a distance of three metres.

Similarly, Timber products will display colour variations across their surface and colour will vary from door to door. Ordering doors to match helps reduce the variation but will not eradicate it entirely.

Woodrite's timber doors are made from the finest timber obtained from managed and sustainable sources. Prior to fitting they must not be stored in direct sunlight or exposed to splashes or rain as colour fading and/or staining may result. Woodrite's product guarantee does not cover natural variations in colour, warping, swelling or shrinkage due to the ordinary natural processes of ageing, fading or the effects of weather or climate nor does it cover the incidence of similar degradation which could have been prevented by carrying out finishing and maintenance procedures as recommended by Woodrite. Doors that are not factory finished should be finished with a microporous stain, front and back, in accordance with the stain manufacturers instructions immediately after fitting.

Garage doors should be inspected upon delivery and viewed in natural daylight (not direct sunlight) from a standard distance of 3 metres to view their overall appearance. From this distance the door panel should appear free from visible marks or distortion, stains, blemishes, indentations or scuffs. If any marks are only visible within 3 metres they will not be considered under warranty.

These terms and conditions do not affect your statutory rights.

presented by:



Woodrite Doors Limited, Unit G2 Borough Road, Buckingham Road Industrial Estate, Brackley, Northants NN13 7BE

Tel 01280 841010 Fax 01280 843180 Email sales@woodritedoors.co.uk Web www.woodritedoors.co.uk

Woodrite reserves the right to alter specifications to design and manufacture without notification. All specifications are correct at time of publication, errors and omissions excepted.